

BUILDING MATERIAL CAN BE:
 - PRE-PAINTED STEEL (IN A VARIETY OF COLOURS)
 - GALVANIZED
 - GALVALUME



STANDARD PANEL WIDTHS ARE 20 IN.

BUILDINGS CAN BE ANY LENGTH TO A MAXIMUM OF 34' WIDE AND 14' HIGH

GABLE STYLE BUILDINGS:
 - CAN HAVE A RIDGE VENT FOR ADDED VENTILATION
 - INCLUDE TIE ROD SUPPORT FOR BUILDINGS OVER 10' IN LENGTH FOR ADDED STRENGTH AND RIGIDITY

SHED STYLE BUILDING
 ROOF SLOPE OF 1/12

FLAT ROOF STYLE BUILDING



BUILDINGS CAN BE GABLE, SHED OR FLAT ROOF STYLE

STANDARD PANEL THICKNESS IS:
 - 3 IN. WHICH CREATES AN R-12 INSULATION VALUE
 - 6 IN. WHICH CREATES AN R-20 INSULATION VALUE

24 GAUGE ALUMINUM OR 26 GAUGE METAL ON THE INTERIOR LINER

PANELS ARE CONSTRUCTED WITH INTERLOCKING TABS THAT FIT TOGETHER WHEN INSTALLED

22 GAUGE METAL IS USED ON THE EXTERIOR OF THE BUILDING,

CORNERS ARE CONSTRUCTED AS ONE PANEL TO ALLOW FOR EASY ASSEMBLY AND AN EXCELLENT WEATHERPROOF SEAL


PIPE, ROOF, OR TANK CUT OUTS CAN BE DONE WITH THE NECESSARY FLASHINGS AND CAULKING

ROOF HATCH AND/OR REMOVABLE PANELS CAN BE ADDED TO ACCESS EQUIPMENT

LIFTING HOOKS CAN BE INSTALLED ON THE ROOF OF A SHED TYPE BUILDING FOR LIFTING OVER EXISTING EQUIPMENT OR WELLHEAD.

LIFTING LUGS CAN BE ADDED TO CORNERS OF SKIDS OF GABLE TYPE BUILDINGS FOR LIFTING

GABLE STYLE BUILDING
 ROOF SLOPE OF 4/12

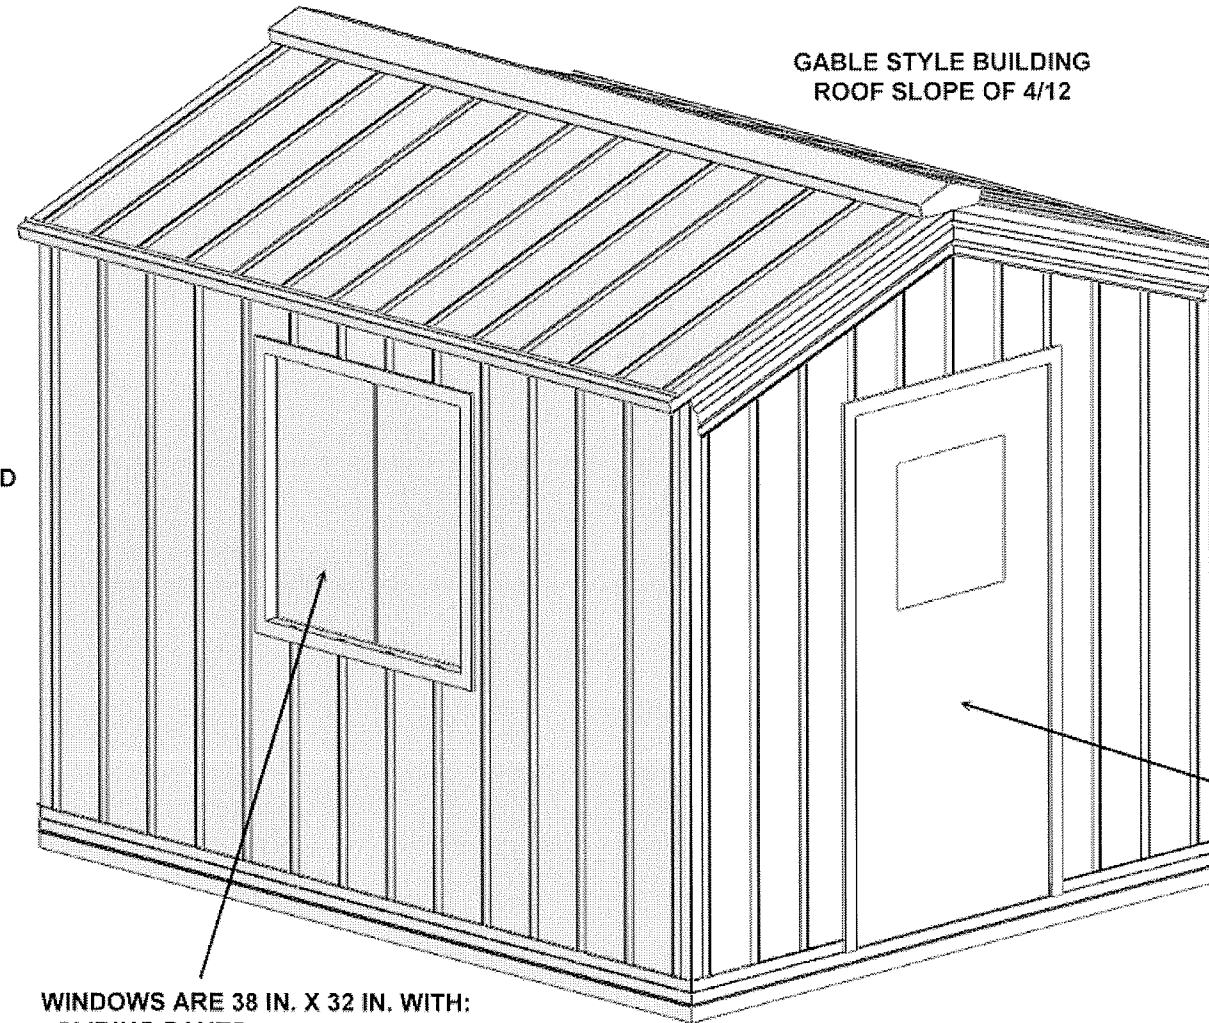

GENERAL INFORMATION ON BUILDINGS:

- CAN HAVE EAVESTROUGHS, AND DOWNSPOUGHTS
- CAN HAVE ICE RAKES FOR SAFETY
- ARE ALL MANUFACTURED WITH THE APPROPRIATE FLASHINGS SCREWS AND CAULKING FOR ENVIRONMENT PROTECTION
- CAN HAVE ANY SIZE ROLL-UP OR OVERHEAD DOOR
- CAN BE EQUIPPED WITH OUR STANDARD 12 IN. X 12 IN. STAMPED LOUVRES OR OUR 24 IN. X 24 IN. MANUAL LOUVRES
- CAN HAVE SPECIFIED AIR CHANGES OR VENTILATION REQUIREMENTS
- ARE MANUFACTURED WITH INTERIOR FLASHINGS FOR ADDED WEATHERPROOFING AND AESTHETICS
- CAN DO LAYOUT OF DOORS AND WINDOWS TO MEET CUSTOMERS SPECIFICATIONS

MANDOOR STANDARD SIZES ARE SINGLE (3' X 7') AND DOUBLE (6' X 7') BUT CAN BE MANUFACTURED TO ANY SIZE


MANDOOR OPTIONS INCLUDE:

- PANIC HARDWARE
- LOCKSET HARDWARE
- INDUSTRIAL WIRE GLASS - 20 IN. X 20 IN.
- PRIMED AND/OR PAINTED TO MATCH BUILDING OR TRIM COLOUR
- WEATHERSTRIPPING
- CLOSURES
- SWEEPS
- CHECK CHAIN
- CANOPY

BIG FOOT METAL SYSTEMS CAN ALSO SUPPLY STAMPED ENGINEERED DRAWINGS IF REQUIRED

WINDOWS ARE 38 IN. X 32 IN. WITH:
 - SLIDING PANES
 - SCREENS
 - GLAZED GLASS
 - FLASHINGS, DRIP CAP AND CAULKING

STANDARD BUILDING FOUNDATIONS ARE:

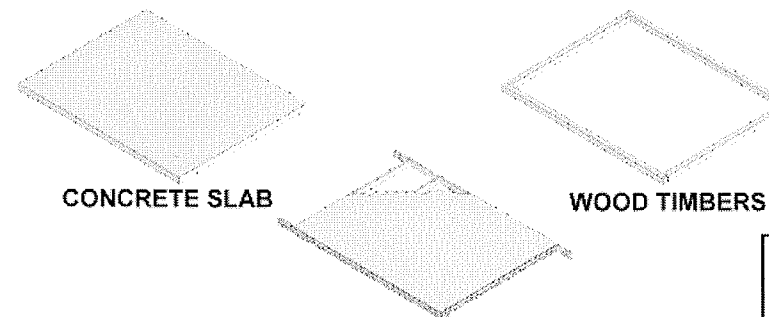

CONCRETE SLAB

WOOD TIMBERS

STEEL C-CHANNEL WITH OR WITHOUT CHECKER PLATE FLOOR

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BIG FOOT METAL SYSTEMS AND REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN CONCENT OF BIG FOOT METAL SYSTEMS IS PROHIBITED

SELF FRAME BUILDING INFORMATION SHEET



(403) 362-4181
 P.O. BOX 2013
 521 INDUSTRIAL ROAD
 BROOKS, ALBERTA, CANADA
 T1R 1C7
 WWW.BIGFOOTMETAL.COM